
## Standard Features:

- Heavy duty 7 ga. #304 stainless steel conveyor frame
- 30" wide, 3-ply, 330# smooth top rubber belting
- 12'-6" discharge height
- 4" heavy duty troughing rollers and straight rollers with sealed bearings
- Automatic hydraulic belt tensioners
- Kubota V1505T 45hp. turbo diesel engine
- Powder coated lockable battery box
- Tandem hydraulic pump
- 27 gallon diesel tank
- 27 gallon hydraulic reservoir with suction screen and return filter, temperature and sight guage
- Heavy duty gear box drive
- Hydraulic lift with pintle hitch, makes hooking and unhooking very easy, tow vehicle can remain hooked while in operation
- Super single flotation tires
- Running gear all metal shot blasted and powder coated
- Low profile intake hopper, 7 ga. mild steel, all metal shot blasted and powder coated
- Factory assembled & tested

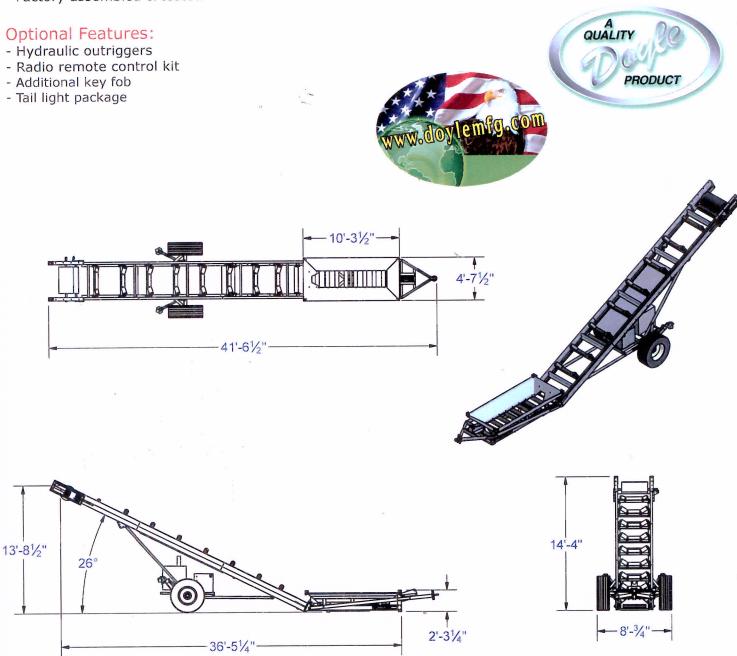

16LFC911 Products and specifications subject to change without notice. Photos may or may not include optional equipment.